Yuasa Scheda Tecnica

Yuasa YBX5100 - Batterie YBX5000 Silver High Performance SMF

Prestazione

Tensione	12V
Capacità (20 ore)	75Ah
Corrente di spunto A (EN1)	710A

Dimensioni

Lunghezza	278mm
Profondità	175mm
Altezza	175mm

Pesi e Misure

Peso medio con acido	17.6kg

Caratteristiche del Monoblocco

Tipo di monoblocco	LB3 DIN
Fissaggi alla base	B13/B14
Indicatore dello stato di carica	✔
Maniglie	✔
Circuito di sfiato	✔
Tipo di coperchio	Doppio Coperchio SMF

Tecnologia

Pastiglia antideflagrante	✔
Tecnologia	Ca/Ca
Separatore	PE
Test antiribaltamento VDA	✔
Corrente di carica raccomandata	4A
Performance Marking	W4-C2-V3-E1

Tipologia dei terminali

T1
Standard DIN Post

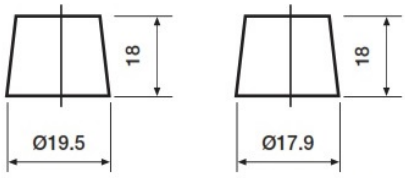

Positive Terminal Negative Terminal

Schema di Collegamento

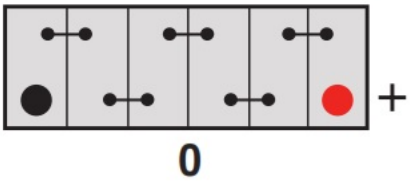

Fissaggio batteria

B3/B4 (B3 with Hold-Down adaptor)

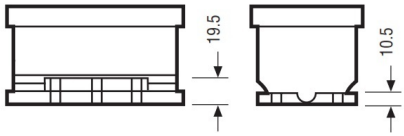

Scheda tecnica prodotta su E&OE

Yuasa Technical Data Sheet

Yuasa YBX5100 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	75Ah
Cold Cranking Amps (EN1)	710A

Dimensions

Length	278mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	17.6kg

Container Features

Case Type	LB3 DIN
Hold Down	B13/B14
State of Charge Indicator	✔
Handles	✔
End Venting	✔
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✔
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✔
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1
Standard DIN Post

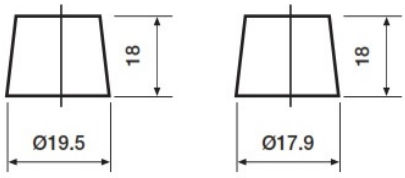

Positive Terminal Negative Terminal

Cell Assembly Layout

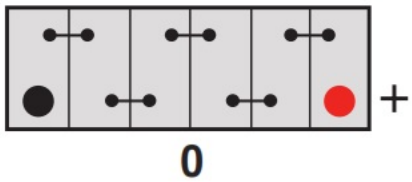

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

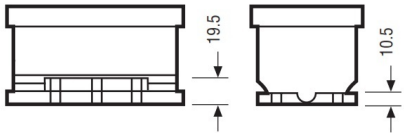

Data Sheet generated on 21/01/2026 – E&OE